


CDMA


Code division ...

IEEE 802.11  
wireless LAN


802.11 a/g/n/b

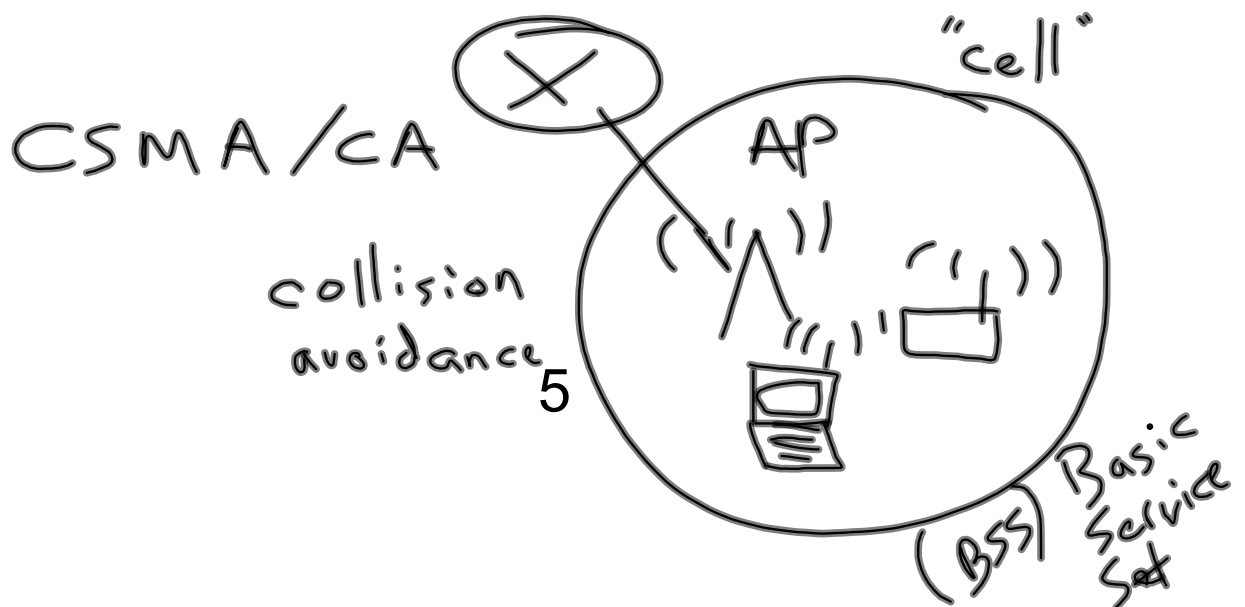




# CSMA / CA

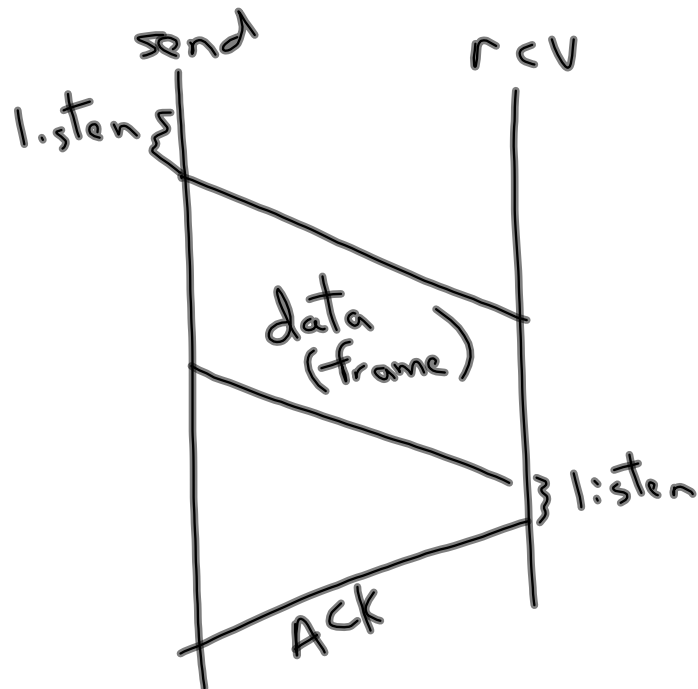

- Avoid collisions
1. send a "request to send" message ↙ RTS
  2. receive a "clear to send"
  3. send data (as above) ↖ CTS

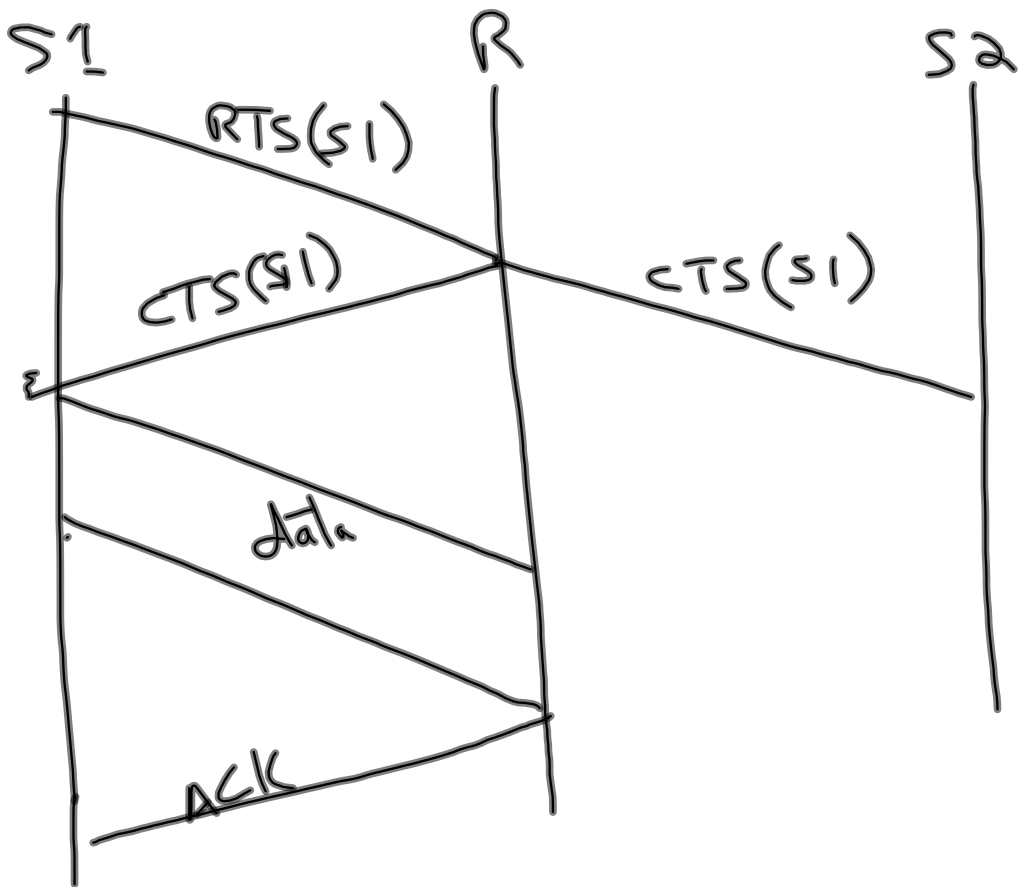

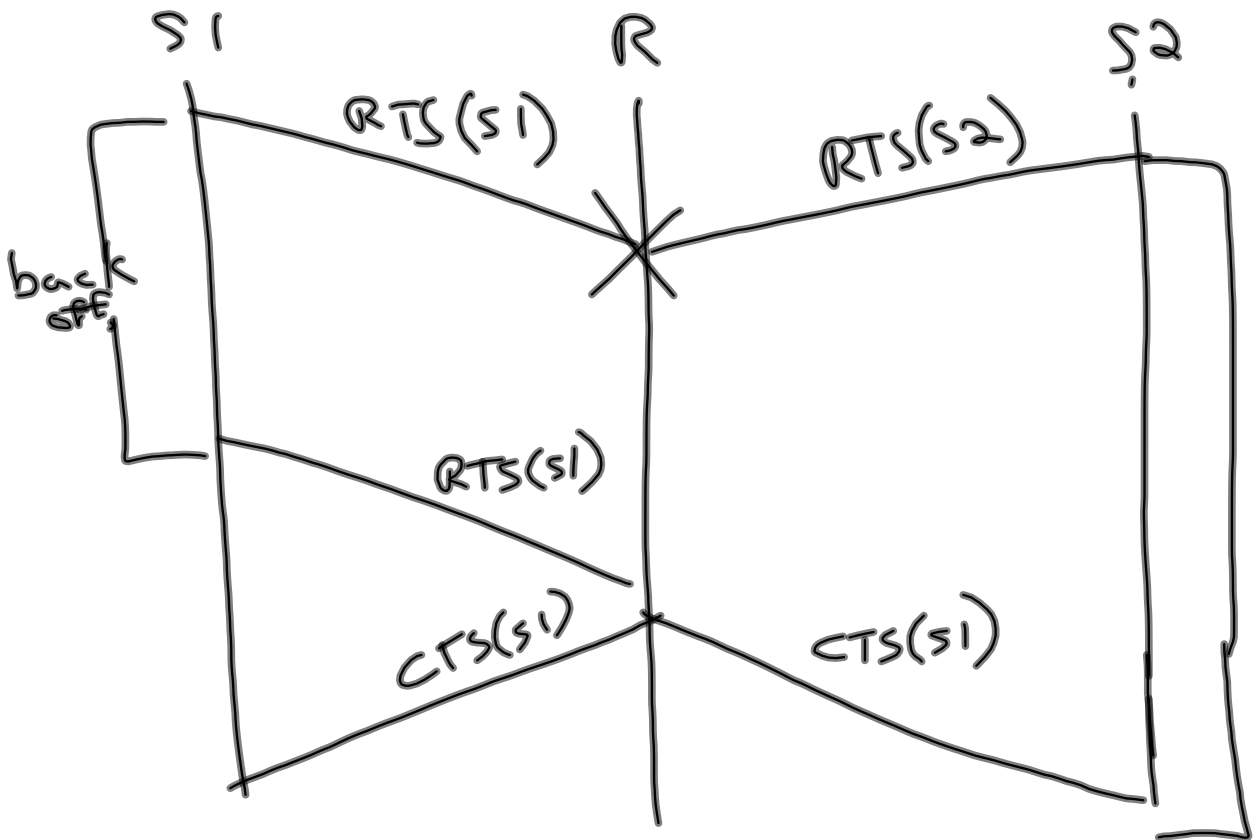

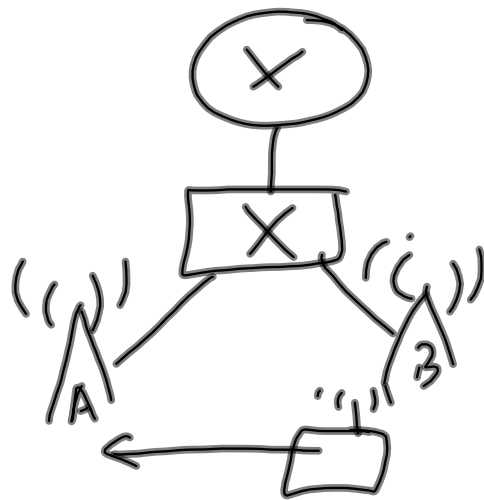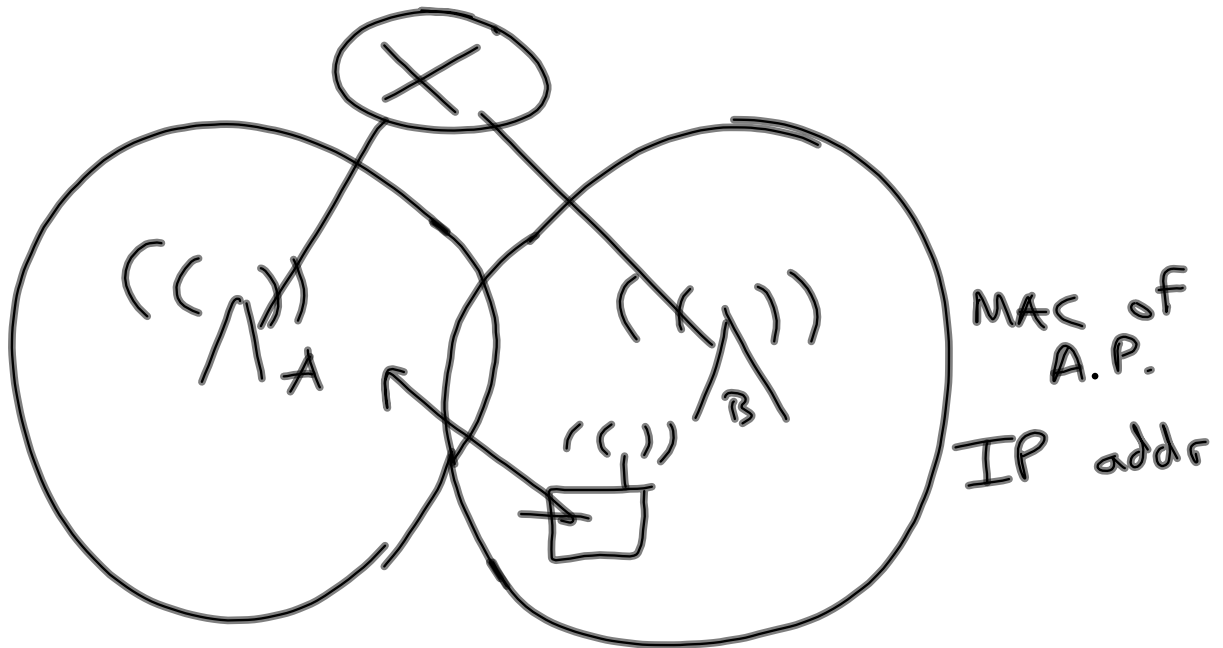

MAC of AP  
IP stays same