



X11

X clients

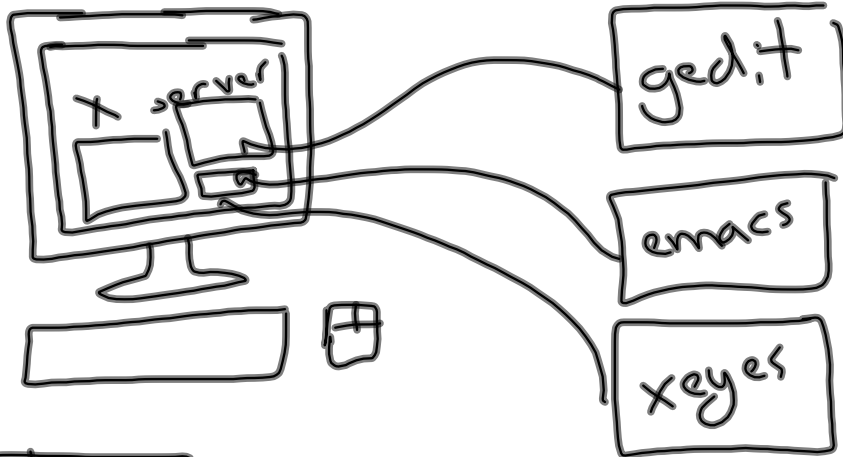

packets  
requests  
reply  
events  
errors

char c = 'g';

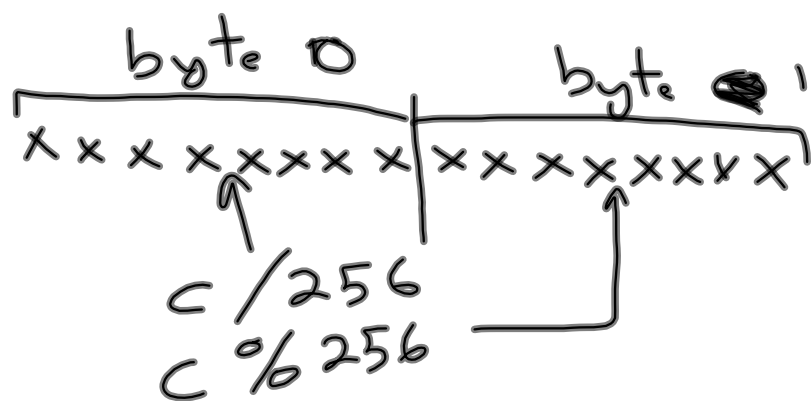

byte 0 =  $(\text{byte})(c \gg 8);$   
byte 1 =  $(\text{byte})(c \& 0xff)$